


CE

KING COBRA ROOFBOLTER

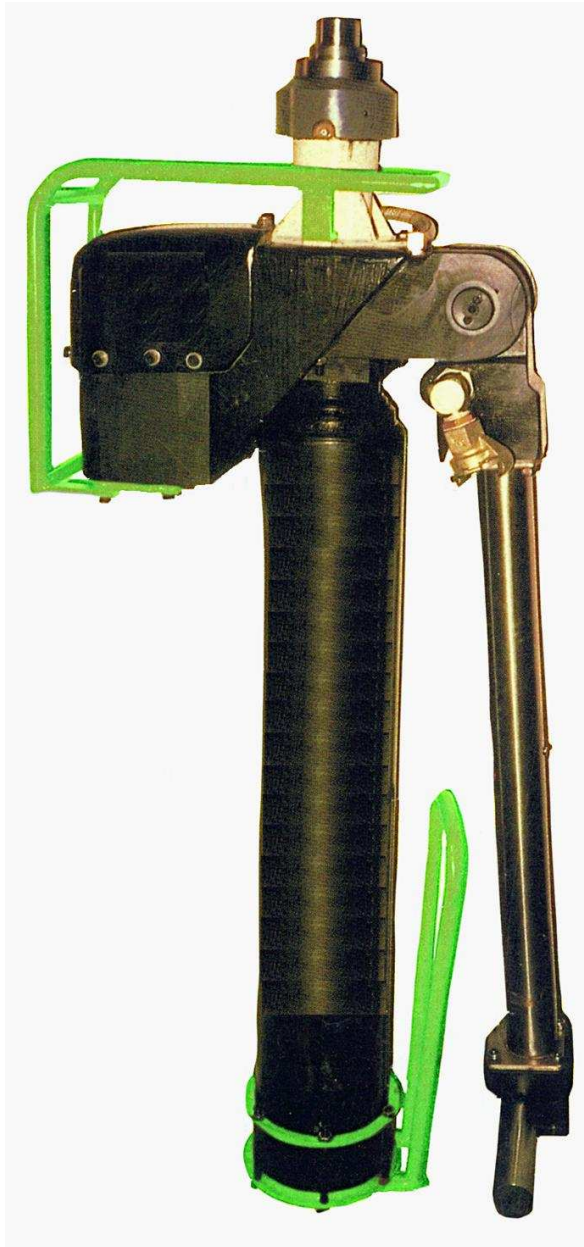

KING COBRA ROOFBOLTER

LIGHTWEIGHT

Lightweight design range from 33.5 to 43 kg

COMPACT

Compact design has been developed for ease of operation

INVERTED LEG

The inverted leg design has telescopic air legs. No moving parts at floor level guarantees longer leg and seal life

ADVANCED THRUST

Available in both advanced thrust and super thrust units designed for ease of column anchor and cable bolting

2, 3 & 4 STAGE UNITS

Lightweight units to suit your requirements are available to suit seam heights from 1 - 4.4 metres

POWER PACK MOTOR

Fitted with a power pack motor, a proven performer, is light, compact and can be fully detached in minutes

ADVANCED DUMPING

Advanced Super-dump system can save valuable time in stressed "strata" conditions.

The twin dump valve system will dump at twice the speed of any other roofbolter

LOW MAINTENANCE

Maintenance is the key word in this day an age. Compared to other designs the KING COBRA has definite advantage of ease in dismantling and assembling



PH: 61 2 4422 6323

FAX: 61 2 4422 5423

www.rambor.com.au

Manufactured by:
RAMBOR PTY LTD
ABN 61 105 301 184
108 ALBATROSS ROAD
SOUTH NOWRA
NSW AUSTRALIA 2541

TECHNICAL SPECIFICATIONS

95mm MOTOR	3 Stage STD Imperial	3 Stage STD Metric	3 Stage MAXI HT
Operating Pressure	80 - 100 psi	551 - 689 kPa	Same
R.P.M	750	750	Same
Air consumption	100 - 120 cfm	2832 - 3398l/m	Same
Water supply	125 - 175 psi	861 - 1206 kPa	Same
Flow rate	12 gal/min	54.5 litres/min	Same
Stall torque	150 ft/lbs	203 Nm	Same
Torque through clutch	250 ft/lbs	339 Nm	Same
<u>Max Leg thrust</u>			
Stage 1	2000 lbf	907 kgf	2500 lbf - 1134 kgf
Stage 2	1500 lbf	680 kgf	2000 lbf - 907 kgf
Stage 3	1000 lbf	453 kgf	1500 lbf - 680 kgf
Noise level	90 - 95 dB(A)	90 - 95 dB(A)	90 - 95 dB(A)
Weight range	74 - 98 lbs	33.5 - 44.5 kg	76 - 100lbs - 34.5 - 45 kg

MACHINE DIMENSIONS

KING COBRA 3 STAGE		
Model	Closed Height	Extended Height
3/1028	1000	2800
3/1131	1100	3100
3/1234	1200	3400

KING COBRA 4 STAGE		
Model	Closed Height	Extended Height
4/0611	600	1100
4/0717	700	1700
4/0821	800	2100

KING COBRA 3 STAGE MAXI HT		
Model	Closed Height	Extended Height
3/1028	1000	2800
3/1131	1100	3100
3/1234	1200	3400